


# STRIBECK

## LIVE CENTRE

TRIPLE BEARING  
LUBRICATED FOR LIFE  
HIGH PRECISION  
RUN OUT WITHIN  
0.005 mm TIR

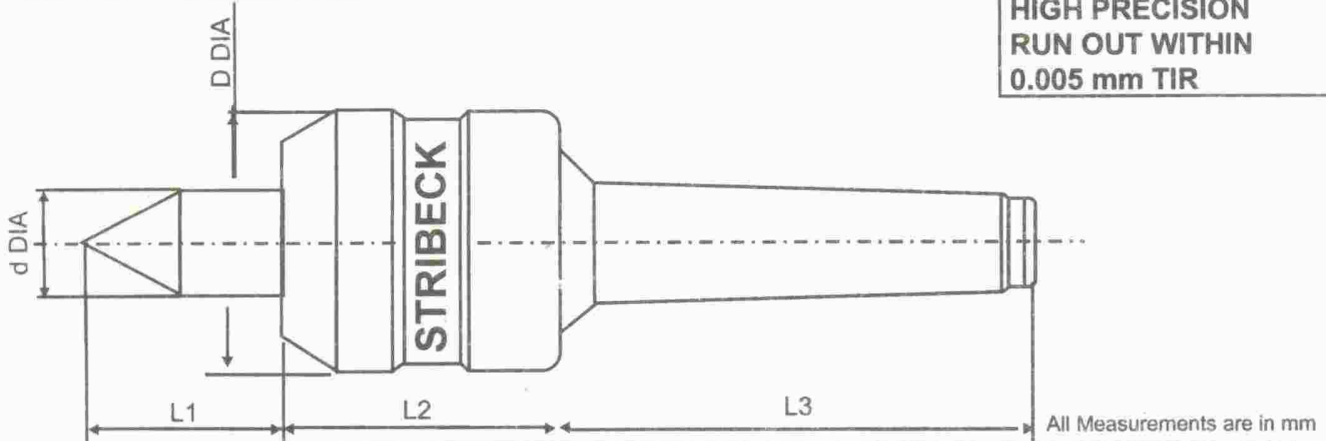

Sl. No.	MORSE TAPER SHANK	MODEL	d DIA	D DIA	L1	L2	L3	CAPACITY	RATED LOAD AT 100 RPM	
									RADIAL	AXIAL
1	1	LC-1030	16	36	22	35	60	STD	50.0 Kgs	72.0 Kgs
2	2	LC-1535	20	45	26	45	73	STD	200 Kgs	300 Kgs
3	2	LC-1740	24.5	50	33	50	73	HEAVY DUTY	250 Kgs	400 Kgs
4	3	LC-1740	24.5	50	33	50	90	STD	250 Kgs	400 Kgs
5	3	LC-2047	29	60	38	56	90	HEAVY DUTY	300 Kgs	750 Kgs
6	4	LC-2047	29	60	38	56	114	STD	300 Kgs	750 Kgs
7	4	LC-2552	36	68	49	67	114	HEAVY DUTY	400 Kgs	900 Kgs
8	5	LC-2552	36	68	49	67	144	STD	400 Kgs	900 Kgs
9	5	LC-3062	40	75	51	70	144	HEAVY DUTY	600 Kgs	1500 Kgs
10	6	LC-4080 3B	54	100	66	72	200	STD	1000 Kgs	2250 Kgs
11	6	LC-4080 4B	54	100	66	95	200	HEAVY DUTY	2000 Kgs	3500 Kgs
12	6	LC-70125 4B	85	150	99	130	200	Ex. H/DUTY	5000 Kgs	10,000 Kgs
13	7	LC-70125 4B	85	150	99	130	274	Ex. H/DUTY	5000 Kgs	10,000 Kgs
14	7	LC-12570 4B	85	185	99	130	274	Ex. H/DUTY	8000 Kgs	20,000 Kgs

WE MAKE IMPROVEMENTS IN THE DESIGN OF OUR PRODUCTS, HENCE THE PRODUCT SUPPLIED MAY HAVE FEATURES DIFFERENT FROM THOSE DESCRIBED IN THE BULLETIN.

MACHINE ELEMENTS - BANGALORE-560 058.